

# DESIGNER RANGE TS.9206 Door Closer



Silver (SE)



Satin Nickel Plate (SNP)



Polished Nickel Plate (PNP)



Electro Brass (PVD)



Satin Stainless Steel (SSS)



Polished Stainless (PSS)



Black (BK)


**NEW** **Marine 316**  
Marine Stainless 316 finish available

## Product Overview

- ✓ Renown High Efficiency, Immense Torque and Ultimate Control.
- ✓ Power Adjustable EN2-6
- ✓ Can be used for Doors weighing 120kg
- ✓ Easy to read instructions, saving over 12 minutes of fitting time
- ✓ Temperature stable hydraulic oil – used between -30°C - +60°C




## Specification Overview

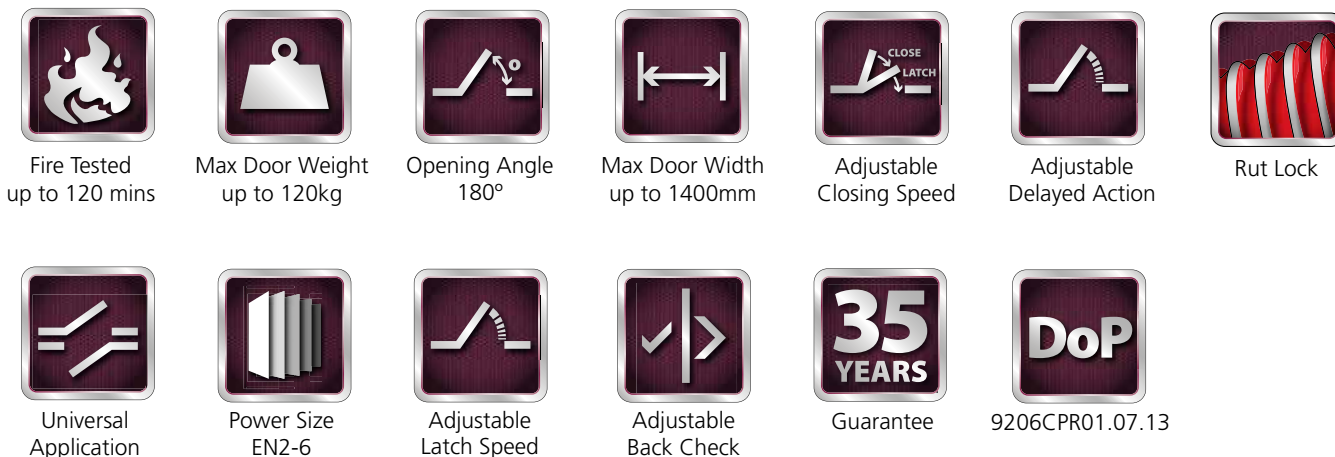

Cover

All dimensions shown are in mm.

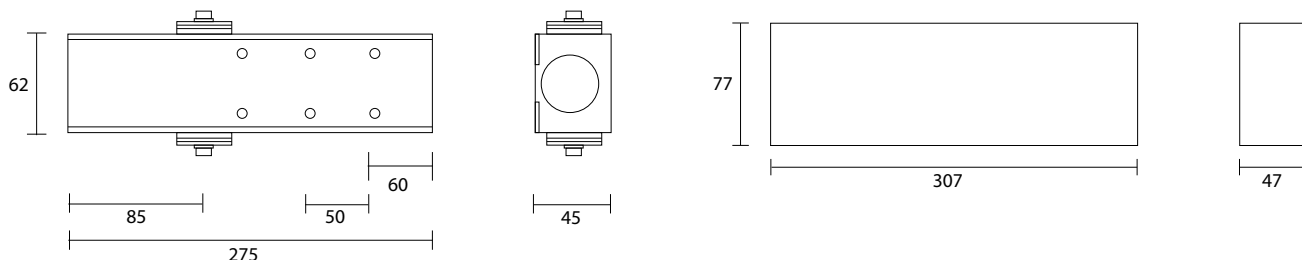

## Technical Information

### BS EN 1154 Classification

TS.9206 door closers have been independently tested to conform with the EN 1154 performance standard. They are CE marked and classified as follows:

Standard Arm Fig 1.

4	8	$\frac{6}{2}$	1	1	3
---	---	---------------	---	---	---

### BS EN 1634 Fire Test

TS.9206 door closers are fire tested to BS EN 1634. (Fig 1, 61, 66, and slide arm applications).

### UL Listed

The TS.9206 has been certified and labelled to the Underwriters' Laboratories (UL) testing, inspection, certification, auditing and validation.

## Options

- Hold-Open arm (Not to be used on fire doors)
  - Drop plate
- Options not covered by CE.*

## Other Benefits

- All finishes available