


ITS.11204.DAX.FM

Concealed Standard Rail Double Action - Frame Mounted

Power
Adjustable
EN2-4 by
Spring

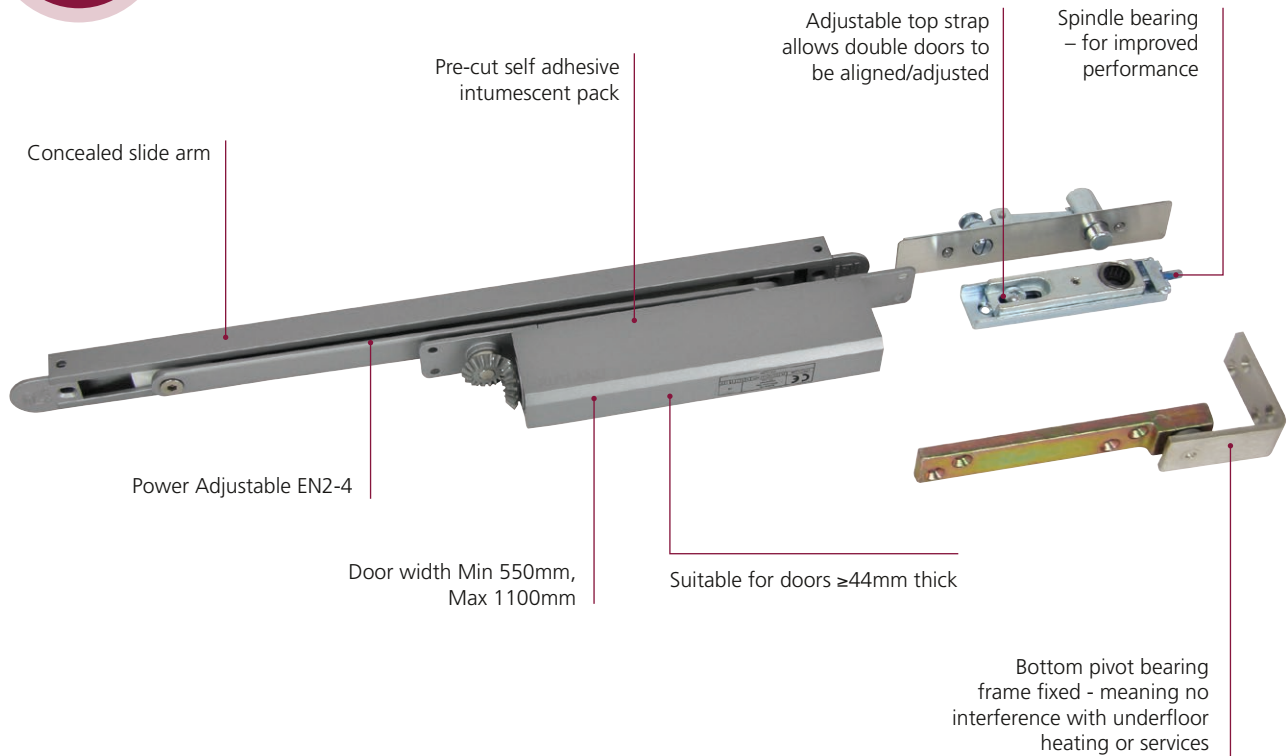

Silver (SE)*
*SS Pivots



Satin Nickel Plate (SNP)

Product Overview

- ✓ Variable power size EN 2-4
- ✓ CE marked
- ✓ Concealed cam and roller mechanism
- ✓ Universal fitting
- ✓ Standard rail
- ✓ Corrosion Grade 3 – Recommended for internal use
- ✓ Easy kit codes makes ordering simple
- ✓ Double action
- ✓ Easy to read instructions, saving over 12 minutes fitting time
- ✓ Easy fitting - no need for cutting out the floor

Specification Overview




Fire Tested
to EN1634



Max Door Weight
up to 80kg



Opening Angle
110°



Door Width
550-1100mm



Min Door
Thickness 44mm



Adjustable
Closing Speed



11204250CP
R071118



Double
Action



Power Size
EN2-4



Adjustable
Latch Speed



Guarantee*





Min Door
835mm



Rut Lock



All dimensions shown are in mm.

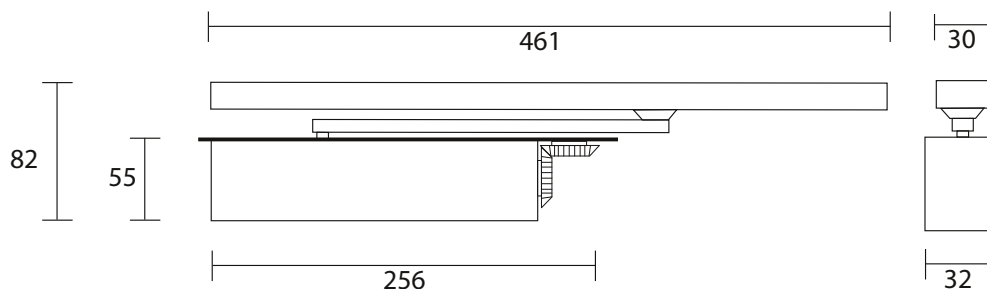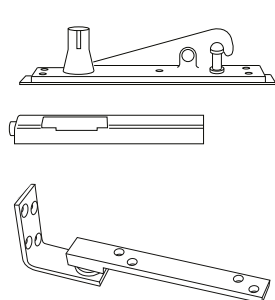

For fitting instructions see website - www.rutlanduk.co.uk

Technical Information

BS EN 1154 Classification

ITS.11204 door closers have been independently tested to conform with the EN 1154 performance standard. They are CE marked and classified as follows:

3	8	2	1	1	3
		4			

BS EN 1634 Fire Test

ITS.11204 closers have been tested to EN 1634 requirements up to 60 minutes– please specify intumescent gasket IP.114. Test certificates are available on request.

FIRE DOORS

Intumescent and smoke seals **MUST** be used on fire doors – please enquire for latest testing details.

*Guarantee for mechanism only.









ITT Timber Leaf & Timber Frame:

May be fitted in previously tested single-acting, latched or unlatched, intumescent sealed timber door and timber frame assemblies.

Options

- Mechanical hold open slide rail (*Not to be used on fire doors. Not covered by CE*)

ITS.11204.DAX.FM Components

Description	EN Size	Finish	Re-order Code	Product Code	Box Qty
 FIRE RATED Double Action-ITS.11204 concealed standard rail slide arm door closer	2-4	Silver	12523	ITS.11204.DAX.FMFR.SE	10
		Satin Nickel	12524	ITS.11204.DAX.FMFR.SNP	10
 NON-FIRE RATED Double Action-ITS.11204 concealed standard rail slide arm door closer	2-4	Silver	12535	ITS.11204.DAX.FM.SE	10
		Satin Nickel	12536	ITS.11204.DAX.FM.SNP	10
 ITS.11204 Mechanism only	2-4	Silver	11165	ITS.11204	10
 ITS.11204 concealed door closer-to-slide arm complete with single action connector bar - CB.4	-	Silver	11996	SA.2.4.SE	25
		Satin Nickel	11997	SA.2.4.SNP	25
 Cushion stop	-	-	11249	SA.CS	50
 Hold open facility (Only for non Fire Doors)	-	-	11251	SA.HO	50
 Slide Arm Block	-	-	11236	SA.1.BLOCK	1
Standard Rail Intumescent Pack	-	-	11161	IP.114	100
 Double Action Pivot Set	-	Stainless Steel	12511	PS.190100.SS	10
Intumescent Pack for PS.190	-	-	12204	IP.190	10