TS.11003 Slide Arm Closer



Product Overview

- ✔ Fixed power size EN 3
- ✓ CE marked
- ✓ Cam and Roller mechanism
- ✓ Universal fitting
- ✓ Easy to read instructions, saving over 12 minutes of fitting time
- ✓ Corrosion Grade 3 Recommended for internal use





Specification Overview



Fire Tested to EN1634



Max Door Weight up to 60kg



Opening Angle 120°



Max Door Width 950mm



Min Door Thickness 44mm



Adjustable Closing Speed



11003CPR01.01.18



Universal Application



Power Size EN3



Adjustable Latch Speed



Guarantee



Min Dooi 835mm




Rut Lock



aaa

All dimensions shown are in mm.

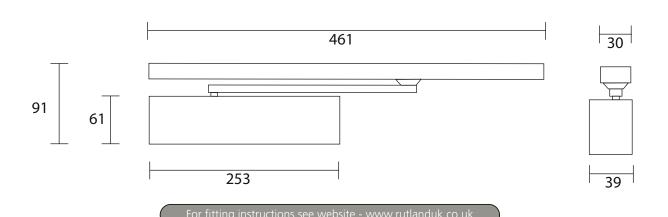

Technical Information

BS EN 1154 Classification

TS.11003 door closers have been independently tested to conform with the EN 1154 performance standard. They are CE marked and classified as follows:

3 8 3 1 1 3

BS EN 1634 Fire Test

TS.11003 closers have been tested to EN 1634 requirements in a variety of door slabs and frame types. Test certificates are available on request.

Assists BS8300 for Document M contracts.

Options

• Mechanical hold open slide rail (available for Non-fire doors. Not covered by CE)

Description	EN Size	Finish	Re-order Code	Product Code	Box Qty
TS.11003 Cam Action Slide Arm Door closer	3	White	12187	TS.11003.3.5.WH	10