

TS.3204 Door Closer

CONTRACT RANGE



#DesignerDoorCloserthatLast



Silver (SE)



Satin Nickel Plate (SNP)



Polished Nickel Plate (PNP)



Electro Brass (PVD)



Gold (GE)

Product Overview

- ✓ Power Size EN3.
- ✓ CE marked.
- ✓ Ideal for the mid-range contracts.
- ✓ Easy to read instructions, saving over 12 minutes of fitting time.
- ✓ Tested to 120 Minutes in EN1634 Fire tests and UL



Specification Overview



Fire Tested
up to 120mins



Max Door
Weight 60kg



Opening Angle
180°



Max Door Width
930mm



Adjustable
Closing Speed



Rut Lock



Universal
Application



Power Size
EN3



Adjustable
Latch Speed





Guarantee



3204CPR01.07.13

All dimensions shown are in mm.

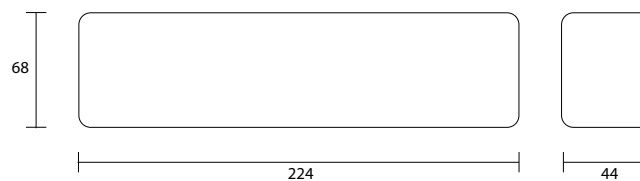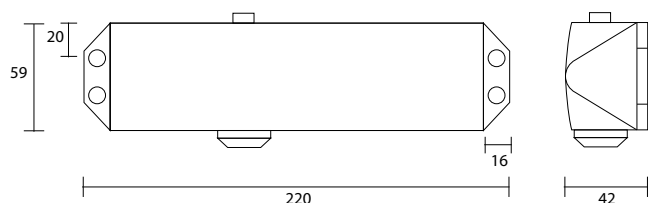

Technical Information

BS EN 1154 Classification

TS.3204 door closers have been independently tested to conform with the EN 1154 performance standard. They are CE marked and classified as follows:

Standard Arm Fig 1.



Parallel Arm Fig 66.



BS EN 1634 Fire Test

TS.3204 closers have been tested to EN 1634 for 30, 60 and 120 minute door sets. Test certificates are available on request.

UL Listed

The TS.3204 has been certified and labelled to the Underwriters' Laboratories (UL) testing, inspection, certification, auditing and validation.

Options

- Hold-Open arm (Not to be used on fire doors)
- Hollow door fixing pack
- Drop plate

Options not covered by CE.

Other Benefits

- Silver and Plated finishes